



HAL
open science

Priority and emerging pollutants in sewage sludge and fate during sludge treatment

Romain Mailler, Johnny Gasperi, Ghassan Chebbo, Vincent Rocher

► To cite this version:

Romain Mailler, Johnny Gasperi, Ghassan Chebbo, Vincent Rocher. Priority and emerging pollutants in sewage sludge and fate during sludge treatment. *Waste Management*, 2014, 34 (7), pp.1217-1226. 10.1016/j.wasman.2014.03.028 . hal-00987018

HAL Id: hal-00987018

<https://enpc.hal.science/hal-00987018>

Submitted on 19 Jun 2018

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

1 Priority and emerging pollutants in sewage sludge and fate during sludge
2 treatment

3
4 R. Mailler ^{a*}, J. Gasperi ^a, G. Chebbo ^a and V. Rocher ^b

5
6 ^a LEESU (UMR MA 102, Université Paris-Est, Agro ParisTech), 6-8 avenue Blaise Pascal,
7 Champs-sur-Marne, 77455 Marne-la-Vallée Cedex 2, France. (Phone : +33145171328)(E-
8 mail: *maillerr@leesu.enpc.fr*; *gasperi@u-pec.fr*)

9 ^b SIAAP, Direction du Développement et de la Prospective, 82 avenue Kléber, 92700
10 Colombes, France. (E-mail: *vincent.rocher@siaap.fr*)

11 * Corresponding author

12
13
14 **Highlights**

- 15
- 16 • 117 pollutants were studied in different treated sludges from Parisian WWTPs
 - 17 • The pollutant pattern is quite similar in the different sludges
 - 18 • During centrifugation, no removal of pollutant is observed
 - 19 • Thermal drying allows a 10 - 80% removal of alkylphenols, PAHs and MBT
 - 20 • Pollutants are not, similarly or more removed than dry matter during digestion

21
22 **Abstract**

23
24 This paper aims at characterizing the quality of different treated sludges from Paris conurbation in
25 terms of micropollutants and assessing their fate during different sludge treatment processes (STP).
26 To achieve this, a large panel of priority and emerging pollutants (n=117) have been monitored in
27 different STPs from Parisian wastewater treatment plants including anaerobic digestion, thermal
28 drying, centrifugation and a sludge cake production unit. Considering the quality of treated sludges,

1 comparable micropollutant patterns are found for the different sludges investigated (in mg/kg DM -
2 dry matter). 35 compounds were detected in treated sludges. Some compounds (metals, organotins,
3 alkylphenols, DEHP) are found in every kinds of sludge while pesticides or VOCs are never
4 detected. Sludge cake is the most contaminated sludge, resulting from concentration phenomenon
5 during different treatments. As regards treatments, both centrifugation and thermal drying have
6 broadly no important impact on sludge contamination for metals and organic compounds, even if a
7 slight removal seems to be possible with thermal drying for several compounds by abiotic transfers.
8 Three different behaviors can be highlighted in anaerobic digestion: i) no removal (metals), ii)
9 removal following dry matter (DM) elimination (organotins and NP) and iii) removal higher than
10 DM (alkylphenols - except NP -, BDE 209 and DEHP). Thus, this process allows a clear removal of
11 biodegradable micropollutants which could be potentially significantly improved by increasing DM
12 removal through operational parameters modifications (retention time, temperature, pre-treatment,
13 etc.).

14

15 **Keywords**

16 Anaerobic digestion; thermal drying; centrifugation; emerging pollutants; priority pollutants; sludge

17

18

19 **1. Introduction**

20

21 Wastewater treatment plants (WWTP) produce an important quantity of sludge resulting from total
22 suspended solids (TSS) removal and growth of microorganisms within biological treatments.

23 Actually, about 1 million tons dry matter (DM) of sludge are produced every year by French

24 WWTPs, while Germany and UK produce respectively 2.2 and 1.8 million tons (Kelessidis and

25 Stasinakis, 2012), for a total of 11 million tons DM of sludge in all Europe (EU-27). The

26 management of these sludges is achieved through three principal pathways: agricultural uses (land

27 farming), incineration and disposal/landfilling (Fytili and Zabaniotou, 2008). In 2008, land farming

28 was the main pathway both in France (> 60%) and in the European Union (> 50%) (Kelessidis and

1 Stasinakis, 2012).

2

3 Contamination of WWTP sludges by micropollutants has been reported for several years (Clarke
4 and Smith, 2011; Harrison et al., 2006; Scancar et al., 2000). This results from pollutant sorption
5 during primary and biological treatments because of their hydrophobicity or propensity to be
6 adsorbed on particles (Byrns, 2001). As sludges are mainly land farmed, this contamination is
7 worrying especially considering accumulation of some micropollutants in sludge and their transfer
8 to the environment, like polybromodiphenyl ethers (PBDE) (Eljarrat et al., 2008), metals (Chipasa,
9 2003), organotins (Craig, 2003) or polychlorobiphenyls (PCB) (Stevens et al., 2002). To limit
10 contamination of the environment by micropollutants, European and national regulations have been
11 established to progressively forbid sludge disposal and regulate land farming. Such regulations
12 concern principally heavy metals, PAHs and PCBs (Table 1). In particular, the Urban Wastewater
13 Treatment Directive (EC, 1986), amended by (91/271/EEC) (EC, 1991), states maximum thresholds
14 and maximum annual flux to land farm for metals.

15
16 **Table 1 - French (order of 8th of January 1998) and European (EC, 1986) thresholds for PCBs, PAHs and metals**
17 **in sludges to landfarm**

	Threshold value in sludge (mg/kg DM)		Maximal flux from sludges in last 10 years (g/m ²)	
	General case	Pasture case	General case	Pasture case
Σ7 PCBs*	0.8	0.8	1.2	1.2
Fluoranthene	5	4	7.5	6
Benzo(b)fluoranthene	2.5	2.5	4	4
Benzo(a)pyrene	2	1.5	3	2
Cadmium	10 (20 - 40)		0.015	
Chrome	1 000		1.5	
Copper	1 000 (1 000 - 1 750)		1.5	
Mercury	10 (16 - 25)		0.015	
Nickel	200 (300 - 400)		0.3	
Lead	800 (750 - 1200)		1.5	
Zinc	3 000 (2 500 - 4 000)		4.5	
Chrome + Zinc + Copper + Nickel	4 000		6	

* PCBs 28, 52, 101, 118, 138, 153 and 180.

Figures presented are from French regulation (order of 8th of January 1998), while European thresholds from Wastewater Treatment Directive (EC, 1986) are given in brackets.

18
19 Despite that, data and knowledge are still missing concerning i) the quality of treated sludges and ii)

1 the efficiency of the sludge treatment processes (STP) for micropollutant removal as well as the
2 mechanisms involved. This paper aims at improving and completing knowledge about Parisian
3 sludges contamination by micropollutants and their fate during four different STPs, i.e. anaerobic
4 digestion, centrifugation, thermal drying and sludge cake production.

5 As no typical sludge treatment layout can be identified, and different configurations exist depending
6 on the capacity of the treatment plant or the quality of treated sludge expected (regulations), the
7 characterization of each process individually seems to be a relevant strategy.

8 To achieve that, a large number of micropollutants (n=117) were monitored in these STPs. Contents
9 were measured in raw, digested, centrifuged, thermally dried sludges and sludge cake (cooked then
10 press filtered). Micropollutant removals were calculated, to better understand the behaviors of these
11 compounds and to determine the potential of these processes for controlling the micropollutant
12 contamination of sludge.

13
14

15 **2. Material and methods**

16
17
18

17 2.1. Sludge treatment processes (STP) description and sampling procedure


19 Three STPs from three WWTPs in Paris were studied (Figure 1). It should be noted that these
20 WWTPs, run by the Parisian public sanitation service (SIAAP), treat wastewater from the same
21 catchment (downstream Paris conurbation) and the comparison of processes and treated sludges
22 (digested sludge - DS, centrifuged sludge - CS, sludge cake - SC and thermally dried sludge - TS,
23 Figure 1) is then relevant to underline the differences in micropollutants fate.

24

25 The Seine Centre plant treats 240 000 m³ of wastewater per day. Sludge produced is first
26 centrifuged to achieve a volume reduction, resulting in a production of almost 21 000 tons DM of
27 centrifuged sludge per year (SIAAP source). Then, sludge is incinerated producing ash and smoke,
28 which is specifically treated to minimize odors. The Seine Aval plant receives 1 700 000 m³ of

1 wastewater per day (biggest in Europe) and produces more than 55 000 tons DM of treated sludge
 2 per year (SIAAP source). The first STP consists in a mesophilic (37°C) anaerobic digestion to
 3 transform an important part of organic matter into biogas and eliminating pathogens and parasites.
 4 Digested sludge is then dewatered by thickening, thermal conditioning (heat exchange and cooking
 5 at 195°C and 20 bars) and press filtration. These successive treatments allow reducing sludge
 6 volume by more than a factor 10 (i.e. DM, Table 2) and producing a dewatered cake called sludge
 7 cake which is reused as agricultural fertilizer. The Seine Grésillons plant treats 100 000 m³ of
 8 wastewater per day. Sludge treatment is performed by centrifugation and thermal drying. The
 9 thermal drying process can operate at a wide range of temperature, but the facility used in this plant
 10 operates at a high temperature (260°C) compared to conventional dryers (generally 105°C
 11 (Voulvoulis and Lester, 2006)). This allows reducing the water content drastically (i.e. DM content,
 12 Table 2) to obtain, after compacting, almost 8 000 tons DM of solid pellets per year (SIAAP source)
 13 which are stocked in big bags or silos before to be reused in agriculture. More information about
 14 WWTPs and treatment processes are presented in supporting material - Table 1 and on SIAAP
 15 website (www.siaap.fr - in French).

16
 17

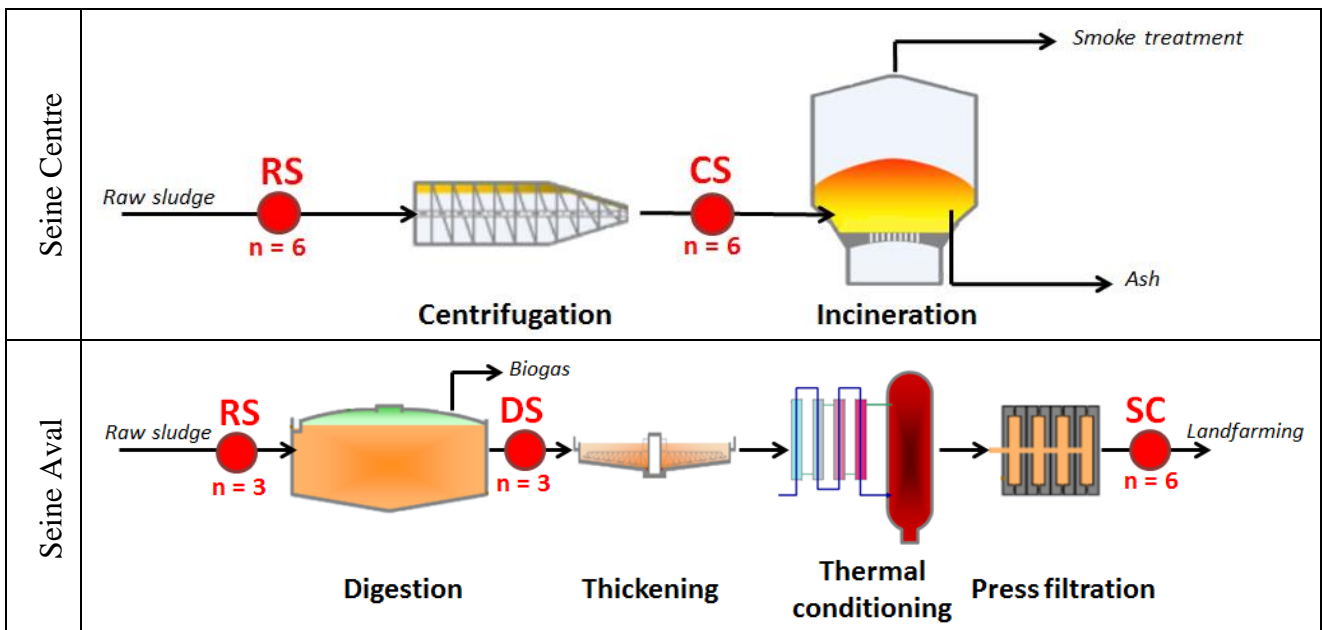

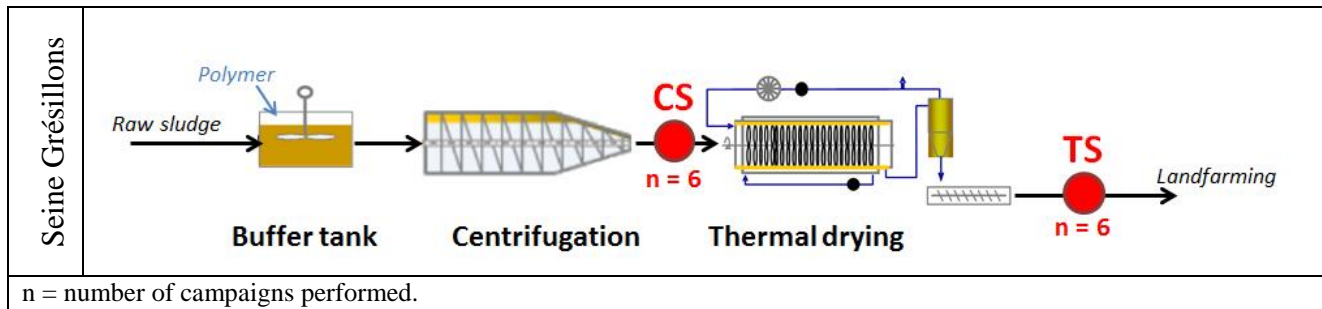


Figure 1 - Layouts of the three studied plants

Different sampling points have been defined to study both the quality of treated sludges and the fate of micropollutants during treatments: raw sludge (RS), CS, DS, TS and SC – Figure 1. Thus, inlet and outlet of digestion, centrifugation and thermal drying were sampled, as well as SC.

While six independent campaigns (between October and December 2011) were performed for thermal drying and sludge cake, consecutive day sampling was considered for centrifugation and digestion to throw off the possible lack of homogeneity. Thus, one sample per day was collected within three consecutive days for digestion (October 2011). Similarly, six samples were collected within two periods of three consecutive days (one in October and one in December) for centrifugation. Each sludge sample was manually collected (2 L for TS and SC - 3 L for RS, CS and DS) respecting all guidelines to avoid sample contamination. SC samples are a mix of sludge produced within a week (7 days) while other samples were punctual due to technical issues. For digestion, a period of 16 days has been applied between inlet and outlet samples to take the solid retention time into account.

2.2. General sludge quality parameters

Table 2 displays the general quality parameters for each sample, i.e. dry matter (DM, in % - 1% = 10 g/L) and volatile matter (VM, in % DM). Both criteria are commonly used in sludge management. Minimum, maximum and mean (in italics below) values are given.

Table 2 - Dry matter and volatile matter contents (min - max - mean) of sludges studied

	Digestion		Thermal drying		Centrifugation		Sludge cake
	RS	DS	CS	TS	RS	CS	TS
Dry matter -	3.0 - 3.3	1.8 - 1.9	24.9 - 27.7	92.9 - 95.6	3.6 - 4.4	22.3 - 24.9	34.2 - 52.7
DM (% - 10 g/L)	3.2	1.8	26.2	94.1	3.9	23.8	48.2

Volatile matter - VM (% DM)	78.8 - 80.1 79.3	62.0 - 62.1 62.0	66.1 - 72.9 70.5	65.4 - 74.4 70.4	74.2 - 78.3 77.1	75.9 - 80.0 79.0	39.1 - 48.0 41.9
-----------------------------	---------------------	---------------------	---------------------	---------------------	---------------------	---------------------	---------------------

Overall, removals of dry matter and volatile matter during anaerobic digestion are about 42% and 56% respectively. This removal is in good agreement with conventional anaerobic digestion removal (Moletta, 2008). VM content in sludge cake is low (42 % DM) compared to the other sludges highlighting a removal during the sludge cake production process (thermal conditioning + press filtration, Figure 1). This is most likely due to the solubilization of a fraction of the organic matter (Neyens and Baeyens, 2003; Valo et al., 2004) during thermal conditioning (195°C and 20 bars). This fraction is then removed with water during press filtration. In contrary, VM is rather constant in both thermal drying and centrifugation, highlighting that VM is whether not or similarly removed (no change in percentage) as DM during these treatments.

2.3. Pollutants and analytical procedures

A total of 117 pollutants were monitored and depending on the compound, two accredited laboratories (COFRAC - French official accreditation committee) were involved: Eurofins and SIAAP laboratory. Table 3 gives the different groups of pollutants monitored, their analytical procedures and quantification limits. The complete list of studied compounds is given in supporting material - Table 2.

Table 3 - Groups of pollutants and analytical methods

Groups ^a	Total ^b	n ^c	Standards	Methods ^d	LOQ ^e
Organotins	4	3 - 6	Eurofins Internal Method	GC-PFPD	0.005
Organochlorine pesticides	22	3 - 6	XP X 33-012	GC-MSMS	0.005 to 0.800
Organophosphorus pesticides	2	3 - 6	XP X 33-012	GC-MSMS	0.02
Nitrogenous herbicides	2	3 - 6	XP X 33-012	GC-MSMS	0.02
Urea pesticides	4	3 - 6	XP X 33-012	GC-MSMS	0.02 to 0.05
Various herbicides	3	3 - 6	XP X 33-012	GC-MSMS	0.02 to 0.05
Benzene based products	12	3 - 6	NF ISO 15009	GC-FID	0.02
Nitrobenzenes	2	3 - 6	XP X 33-012	GC-MSMS	0.02
VOCs	3	3 - 6	XP X 33-012	GC-MSMS	0.05
Phenolic compounds	17	3 - 6	NF ISO 15009	GC-ECD	0.02
DEHP	8	3 - 6	XP X 33-012	GC-MSMS	0.04 to 0.05
Alkylphenols	1	3 - 6	XP X 33-012	GC-MSMS	0.05
PBDEs	6	3 - 6	XP X 33-012	GC-MSMS	0.01
Other organic compounds ^f	9	3 - 6	XP X 33-012/Isotopic Dilution	GC-MSMS	0.05
<i>Eurofins screening</i>	3	3 - 6	XP X 33-012	GC-MSMS	0.01 to 0.02
PAHs	98	3 - 6	NF ISO 17993	GC-MSMS	0.04 to 0.2

PCBs	7	3 - 6	XP X 33-012	GC-MSMS	0.01
Metals	6	3 - 6	NF EN ISO 11885 (T90-136)	ICP-AES	5 to 20
<i>SIAAP laboratory screening</i>	<i>19</i>				

a Groups of molecules: DEHP = di(2-ethylhexyl) phthalate ; PBDE = polybromodiphenyl ethers; VOC = volatile organic compounds; PAH = polycyclic aromatic hydrocarbons; PCB = polychlorobiphenyls.

b Number of molecules.

c Number of measuring campaigns.

d Analytical methods: GC = gas chromatography; GC-PFPD = GC with pulsed flame photometric detector; GC-MSMS = GC with tandem mass spectrometry; GC-ECD = GC with electron capture detector; GC-FID = GC with flame ionization detector; ICP-AES = inductively coupled plasma with atomic emission spectrometry.

e Quantification limit in mg/kg DM.

f Chloroalkanes C10-C13, tributylphosphate and hexachlorocyclopentadiene.

2.4. Methodology of result exploitation and efficiency evaluation

Only contents above the quantification limits were considered. Then, removals have been calculated only when the compound is quantified both in inlet and outlet of the treatment. Removals could be also evaluated when the compound is quantified only in inlet or outlet, but this case was not encountered here.

For the second part of this paper dealing with pollutant fate during sludge treatment, thermal drying and centrifugation are differently examined from anaerobic digestion. In fact, dry matter is not removed and only water quantity is reduced (volume reduction) during dewatering treatments such as thermal drying and centrifugation. Given this, removals of micropollutant content (in mg/kg DM) have been considered for these treatments since it is not linked to the volumetric flow, which varies between inlet and outlet resulting from water removal.

In contrary, since the matrix is reduced as regards digestion, removal calculations were not based on content removals but on the removal of micropollutant loads. Therefore, the micropollutant loads ($L_{\mu p}$) have been calculated according to Equation 1.

$$L_{\mu p} \left[\frac{mg_{\mu p}}{day} \right] = C_{\mu p} \times DM \times Q_v;$$

With $C_{\mu p}$: micropollutant content (mg/kg DM), DM: dry matter content (kg/L) and Q_v : sludge feed rate (L/day).

Equation 1

A conservation of volumetric flow during anaerobic digestion has been considered. The removal of

1 load (R_{load}) is then given by Equation 2, calculated from the removal of the micropollutant content
2 (R_C) and the removal of the dry matter content (R_{DM}).

$$R_{load} = (L_{in} - L_{out}) / L_{in} = 1 - C_{out} / C_{in} \times DM_{out} / DM_{in} = 1 - (1 - R_C) \times (1 - R_{DM});$$


Equation 2

3. Results and discussion

3.1. Micropollutant contamination of treated sludges

9
10 Figure 2 displays the quality of treated sludges regarding micropollutants. Each type of sludge
11 (number of samples in brackets) and quantification limits for each compound detected are
12 illustrated. A table with contents of all compounds found in treated sludges is given in supporting
13 material - Table 3. In order to enable comparison of results, Table 4 provides a literature synthesis
14 concerning micropollutant sludge contents.

15

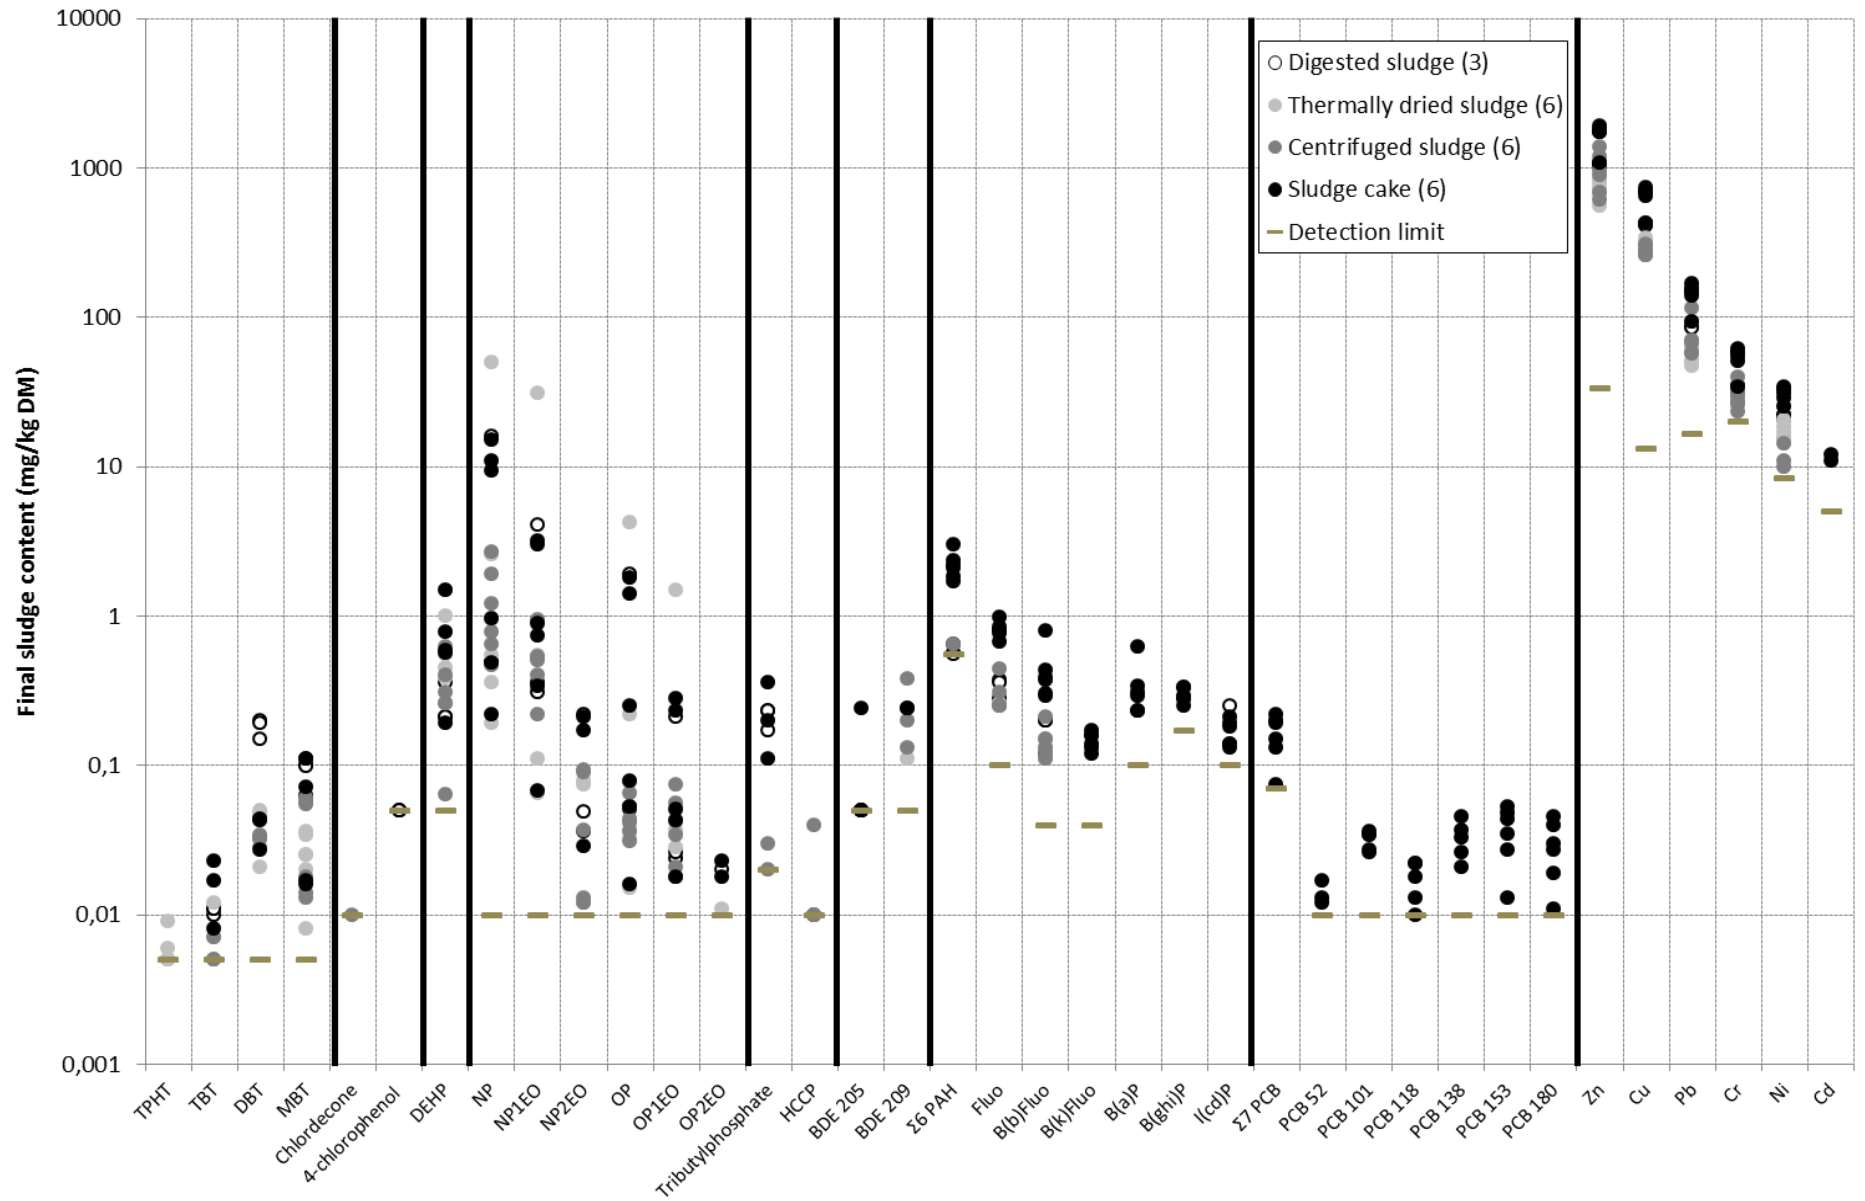

1 With TPHT: triphenyltin, TBT: tributyltin, DBT: dibutyltin, MBT: monobutyltin, DEHP: di(2-ethylhexyl)phthalate, NP: nonylphenols, NP1EO: nonylphenol monoethoxylate, NP2EO:
 2 nonylphenol diethoxylate, OP: octylphenol, OP1EO: octylphenol monoethoxylate, OP2EO: octylphenol diethoxylate, HCCP: hexachlorocyclopentadiene, BDE 209: decabromodiphenyl ether ;
 3 Fluo: fluoranthene, B(b)Fluo: benzo(b)fluoranthene, B(k)Fluo: benzo(k)fluoranthene, B(a)P: benzo(a)pyrene, B(ghi)P: benzo(ghi)perylene, I(cd)P: indeno(1,2,3-cd)pyrene, Zn: zinc, Cu: copper,
 4 Pb: lead, Cr: chromium, Ni: nickel, Cd: cadmium.

5 **Figure 2 - Micropollutant contents of treated sludges studied**

6

Table 4 - Literature review of studied micropollutants in sludge

Molecules	Location	Type of sludge	n ¹	Mean ²	Min ²	Max ²	Reference
<i>Organotins</i>							
TPHT	World	Various	5	0.63	<0.02	9	(Clarke and Smith, 2011)
TBT	Sweden	Digested	1	0.004	*	*	(Olofsson et al., 2012)
	Switzerland	Digested	1	1.1 ± 0.4	*	*	(Fent, 1996)
	World	Various	7	0.86	0.02	6	(Clarke and Smith, 2011)
DBT	Sweden	Digested	1	0.075	*	*	(Olofsson et al., 2012)
	Switzerland	Digested	1	1.5 ± 0.5	*	*	(Fent, 1996)
	World	Various	6	1.28	0.41	7.5	(Clarke and Smith, 2011)
MBT	Sweden	Digested	1	0.074	*	*	(Olofsson et al., 2012)
	Switzerland	Digested	1	0.5 ± 0.2	*	*	(Fent, 1996)
	World	Various	6	0.93	0.1	6	(Clarke and Smith, 2011)
<i>Phtalates</i>							
DEHP	Finland	Digested	1	126	91	179	(Martinen et al., 2003)
	Spain	Digested	1	159	13	345	(Aparicio et al., 2009)
	Spain	Thermally dried	1	148.8	1.5	3 514	(Abad et al., 2005)
	World	Various	13	58	<0.02	3 514	(Clarke and Smith, 2011)
<i>Alkylphenols</i>							
NP	Greece	Digested	1	0.17	<0.04	0.45	(Stasinakis et al., 2008)
	Spain	Digested	1	102.1	<0.19	358.2	(González et al., 2010)
	France	Thermally dried	1	61.7	16.5	124.9	(Ghanem et al., 2007)
	World	Various	24	128	0.02	2530	(Bergé et al., 2012a)
NP1EO	Greece	Digested	1	12.3	1.01	41.3	(Stasinakis et al., 2008)
	Spain	Digested	1	53.2	<0.75	287.8	(González et al., 2010)
	World	Various	18	40.2	0.15	850	(Bergé et al., 2012a)
<i>Various</i>							
Tributylphosphate	Denmark	Various	1	*	<0.020	2.400	(Tørsløv et al., 1997)
	Sweden	Digested	1	0.011	*	*	(Olofsson et al., 2012)
<i>PBDEs</i>							
BDE 209	Sweden	Various	1	0.120	0.006	1.000	(Law et al., 2006)
	Germany	Digested	1	0.443	0.133	1.339	(Knoth et al., 2007)
	World	Various	14	1.039	0.003	18.632	(Clarke and Smith, 2011)
Σ6 PBDEs ³	Sweden	Various	1	0.250	0.024	1.260	(Law et al., 2006)
	Germany	Digested	1	0.577	0.186	1.627	(Knoth et al., 2007)
Σ8 PBDEs ⁴	World	Various	7	1.360	0.005	4.690	(Clarke and Smith, 2011)
<i>PAHs</i>							
Σ6 PAHs ⁵	UK	Digested	1	14.8	4.75	28.1	(Stevens et al., 2002)
	France	Dewatered	1	1.68	0.52	3.36	(Blanchard et al., 2004)
Σ11 PAHs ⁶	Spain	Thermally dried	1	1.89	0.13	7.35	(Abad et al., 2005)
<i>PCBs</i>							
Σ7 PCBs ⁷	UK	Digested	1	0.080	0.033	0.221	(Stevens et al., 2002)
	Spain	Thermally dried	1	0.041	<0.006	0.131	(Abad et al., 2005)
	France	Dewatered	1	0.617	0.12	1.93	(Blanchard et al., 2004)
<i>Metals</i>							
Zn	China	Dewatered	1	557.4	361.0	1 105.9	(Chen et al., 2008)
	Greece	Digested	1	4 500 ± 450	*	*	(Karvelas et al., 2003)
	France	Treated	1	875 ± 1005	*	*	(Martin et al., 2008)
Cu	China	Dewatered	1	557.4	361.0	1 105.9	(Chen et al., 2008)
	Poland	Digested	1	240.4 ± 1.2	*	*	(Sprynskyy et al., 2007)
Pb	Greece	Digested	1	1 200 ± 220	*	*	(Karvelas et al., 2003)
	France	Treated	1	335 ± 338	*	*	(Martin et al., 2008)
	China	Dewatered	1	225.4	67.0	659.0	(Chen et al., 2008)
	Poland	Digested	1	38.12 ± 1.2	*	*	(Sprynskyy et al., 2007)
	Greece	Digested	1	330 ± 84	*	*	(Karvelas et al., 2003)

France	Treated	1	71 ± 70	*	*	(Martin et al., 2008)
--------	---------	---	---------	---	---	-----------------------

¹ n = number of publications.
² in mg/kg DM.
³ BDE 47, 99, 100, 153, 154 and 209.
⁴ BDE 28, 47, 99, 100, 153, 154, 183 and 209.
⁵ Fluoranthene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, benzo(ghi)perylene and indeno(1,2,3-cd)pyrene.
⁶ See ⁵ + acenaphthene, phenanthrene, fluorene, pyrene and benzo(j)fluoranthene.
⁷ PCB 28, 52, 101, 118, 138, 153 and 180.

1 Out of the 117 molecules monitored (Table 3), 35 are detected in treated sludges but pesticides,
2 VOCs, hepta-, hexa-, penta-, tetra- and octa- PBDEs and benzene based products (BBP) were never
3 detected. Concerning pesticides, it is consistent as they are mainly hydrophilic ($\log K_{ow} < 3-4$) and
4 their presence in water are both variable and weak (Gasperi et al., 2010). Moreover, a lot of them
5 are now forbidden (i.e. endosulfan or atrazine). Similarly, VOCs and BBPs are volatile and mainly
6 removed by volatilization during wastewater treatment (Byrns, 2001; Joss et al., 2008). Finally,
7 BDE 209 is the main PBDE congener used and found in water by far and other congeners are
8 generally quantified in sludge in lower contents than the detection limit in this study (50 $\mu\text{g}/\text{kg}$
9 DM), as showed by (Knoth et al., 2007). Contrariwise, metals (Zn, Pb, Cu and Cr), organotins,
10 DEHP and alkylphenols are always detected in all samples. In addition, tributylphosphate, a
11 hydrophobic compound principally used as extractant and plasticizer but also employed as anti-
12 foaming or herbicide agent in detergents or paints, was detected in several samples. PCBs and
13 PAHs are classically found in sludges (Table 4), but they are only detected in sludge cake in this
14 study due to analytical performances (detection and quantification limits).

15
16 The pollutant content variability is broadly weak (less than one order of magnitude) for one type of
17 sludge except for alkylphenols. For this family, a variability of two orders of magnitude is observed
18 within a type of sludge, as observed for DS and TS comparatively to others sludges. This high
19 variability of NP was also observed for wastewater by (Bergé et al., 2012b). Contents from sludge
20 to sludge vary in a range of about one order of magnitude due to treatments but overall all sludges
21 have a similar micropollutant pattern. This is consistent as they are produced by WWTPs treating
22 water from the same catchment. Sludge cake and digested sludge are the most contaminated,

1 particularly for PAHs, PCBs and metals, with contents found in the upper part of the range. This
2 results from a dry matter removal of more than 40% allowed by digestion and further treatments
3 (sludge cooking) in Seine Aval (Figure 1). In contrary, contents in centrifuged and thermally dried
4 sludges are found in the lower part of the range for most of the compounds.

5
6 Contents found are in accordance with the literature (Table 4), particularly for organotins (0.005 -
7 0.2 mg/kg DM), alkylphenols (NP 0.22 - 50 and NP1EO 0.067 - 31 mg/kg DM), BDE 209 (0.11 -
8 0.38 mg/kg DM), individual PAHs (0.11 - 0.99 mg/kg DM), PCBs (0.010 - 0.053 mg/kg DM) and
9 metals (10-3 000 mg/kg DM). In particular, high contents of metals, NP and NP1EO are observed
10 while other compounds are all found below 1 mg/kg dm. Tributylphosphate is poorly documented
11 in sludge and is found between 0.02 and 0.36 mg/kg DM. Surprisingly, DEHP is found in the very
12 lower part of the range displayed in the literature (0.1 - 1 mg/kg DM), especially in digested sludge.
13 Nevertheless, (Blanchard et al., 2012) observed similar DEHP levels in sludge coming from the
14 same plants.

15
16 Comparing to regulations (Table 1), treated sludges respect European standards (EC, 1986) for
17 metals overall, except Cd for which two sludge cake samples slightly exceeded the actual threshold
18 value (10 mg/kg DM). Similarly, French standards (Table 1) are respected as contents of $\Sigma 7$ PCBs
19 (< 0.8 mg/kg DM) and both individual and sum of PAHs (< 2 and < 5 mg/kg DM) are always below
20 the threshold values for agricultural reuse (EC, 2001). In addition and as shown by Figure 3
21 illustrating the historical evolution of heavy metals and PAH yearly average contents in sludge
22 cake, no exceedances of threshold values were observed in the past, except the first years after the
23 application of the Urban Wastewater Treatment Directive (EC, 1986) for Zn, Pb and Cd. Zn content
24 respects regulation since 1988, Pb since 1987 and Cd since 1993, while Cu, Ni and Cr ones have
25 always been below threshold values on a yearly average basis. Similarly, PAH contents were

1 always in accordance with French standards since they are measured (2001). All data presented in
2 Figure 3 were provided by SIAAP from their routine quality controls which are accredited and
3 subject to European norms. They are published for the first time (PAHs) or represent an update of
4 former works (metals - (Meybeck et al., 2007)).

5 Moreover, contents obtained in this study (mean values in the box on the right - Figure 3) are totally
6 consistent as they are in the continuity of the time-trends from Seine Aval sludge, both for PAHs
7 and metals.

8
9 An important decrease of metal contents in sludge cake is observed since the 80s. In particular,
10 contents have decreased from 1980 to 2012 with a factor 3 for Zn (-70%), a factor 7 for Cr (-89%)
11 and a factor 3 to 5 for Ni (-88%), Cu (-65%), Pb (-80%) and Cd (-95%). This tendency results from
12 a decrease of emissions like atmospheric fallout, roof runoff, street runoff, domestic sewage and
13 industrial sewage (Thevenot et al., 2007), which was driven by different regulatory standards
14 adopted over past decades and by global de-industrialization of Parisian catchment (Meybeck et al.,
15 2007), inducing changes in metal uses and decrease of both industrial and domestic metal
16 discharges. However, this decrease is not linear and three phases can be observed: until 1994
17 contamination of sludge decreased significantly (i.e. -76% for Zn), then between 1994 and 1996 a
18 short period of increase is observed before another phase of decrease which is slight and tends to
19 stabilize in the 2000s. Finally, all metals seem to undergo the same evolutions. PAH data are
20 available since 2001 and it is not possible to establish a clear trend as contents vary with a factor 2
21 from year to year. In fact, the evolutions of the three PAH contents in sludge seem linked as they
22 have all the same historical pattern. Even if contents seem overall stable over the years, periodic
23 evolutions seem to occur when looking at weekly data (not represented), with contamination peaks
24 observed regularly.

25

1 Actually, time-trends of sludge contamination significantly follow time-trends of quantity used in
2 the society, generally decreasing due to regulatory actions, as shown by (Olofsson et al., 2012).
3 Even if no time-trend is available for PBDEs in Parisian sludge, (Ricklund et al., 2009) observed a
4 factor 10 increase in Swedish treated sludge content of BDE 209 between 2000 and 2009, showing
5 the increasing use of this compound during this period. Thus largely used compounds can have a
6 tendency to contaminate more and more sewage sludge if limitation is not stronger enough.

7

8 3.2. Removal of micropollutants by sewage sludge treatments


9

10 3.2.1. Thermal drying and centrifugation

11

12 Figure 4 displays the content removals of studied compounds within dewatering processes (thermal
13 drying and centrifugation).

14

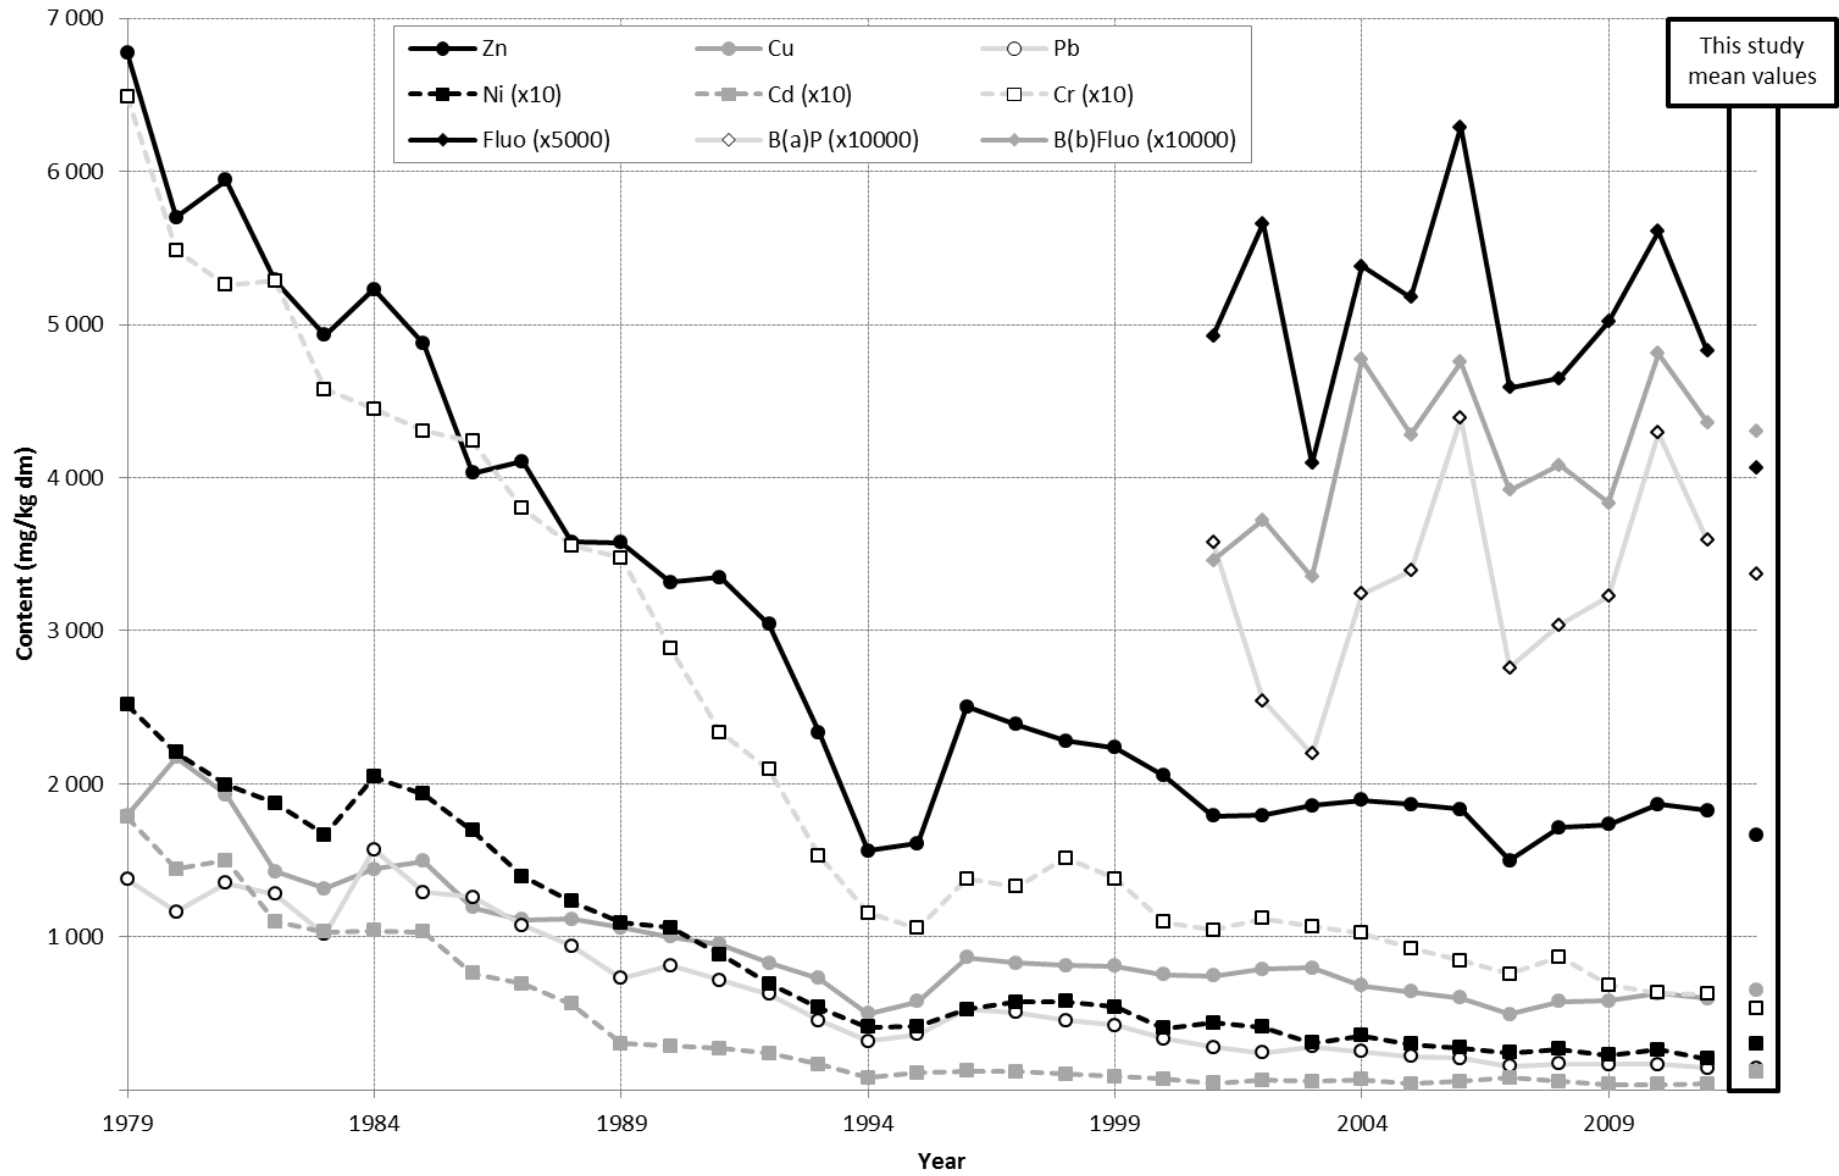

1
2

Figure 3 - Historical evolution of metal and PAH contamination of sludge cake from SIAAP routine quality controls at Seine Aval WWTP

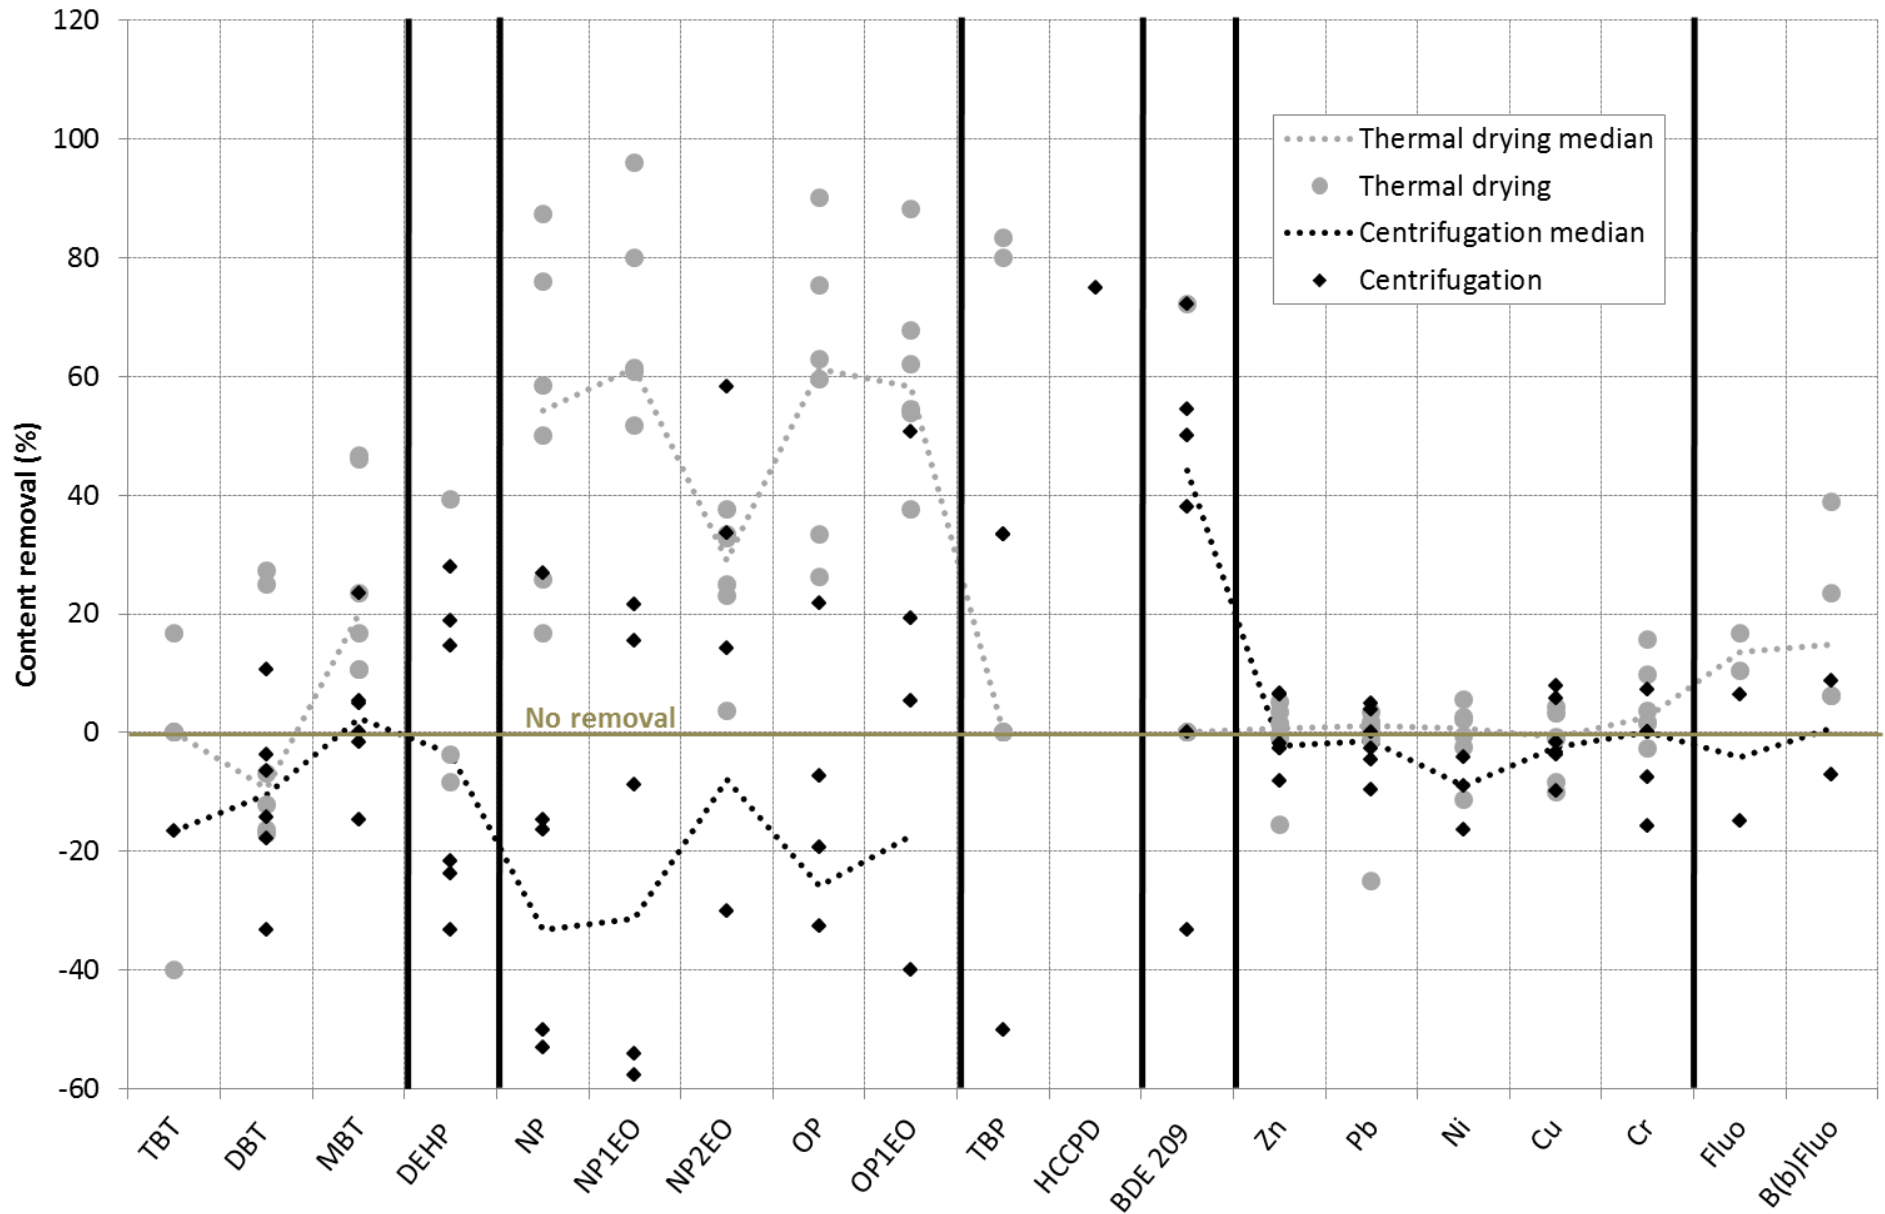


Figure 4 - Fate of micropollutants during dewatering processes

1 Results obtained for both dewatering processes show a high variability of content removals, except
2 for metals and PAHs. The higher variability of removal for organic pollutants, particularly for
3 alkylphenols, compared to metals, probably results from both the significantly lower contents of
4 these compounds (higher analytical uncertainty) and the variability of the mechanisms involved in
5 their removal. For metals, the low variability can be explained by both the lower analytical
6 uncertainty and their fate during sludge treatment, since no removal mechanism is occurring for
7 them.

8
9 Values calculated for hexachlorocyclopentadiene and tributylphosphate have to be considered with
10 caution as these molecules were always detected very close from their detection limits or not
11 detected.

12
13 Most of pollutants are broadly not removed during dewatering treatments, whatever the process
14 used. This is particularly significant for metals as they are known to be highly persistent (not
15 biodegradable and volatile) during sludge treatment (Chipasa, 2003; Dong et al., 2013). Contents of
16 metals, TBT, DBT, tributylphosphate and DEHP are not affected by both treatments.

17
18 Only alkylphenols, MBT, PAHs and BDE 209 seem to have a different behavior in both treatments.
19 Contrary to centrifugation, thermal drying seems to allow a quite stable removal of about 10 - 40%
20 for PAHs and MBT, and a very variable removal of 20 - 90% for alkylphenols. As temperature
21 inside the dryer reaches 260°C, transfers to atmosphere by desorption and volatilization could be
22 significantly enhanced as depicted by (Tuncal et al., 2011) in spite of a short solid retention time (3
23 min). Similarly, abiotic degradation of these compounds, such as hydrolysis, may occur at this
24 temperature (Kepp et al., 2000; Veeken and Hamelers, 1999). More specific measurements should
25 be performed to highlight these pathways. In contrary, a removal of about 50% of BDE 209 is

1 observed in centrifugation despite a high variability, while content is rather stable during thermal
2 drying. As this molecule is strongly hydrophobic ($\log K_{ow} = 12.8$, (Langford et al., 2005)), so
3 strongly linked to the particulate phase, further specific measurements are needed to explain this
4 astonishing result.

5 6 3.2.2. Anaerobic digestion

7
8 Anaerobic digestion is widely used all over the world to stabilize sludge and reduce the quantity of
9 dry matter. Results obtained during campaigns performed are represented in Figure 5 separated by
10 behavior by dotted lines.

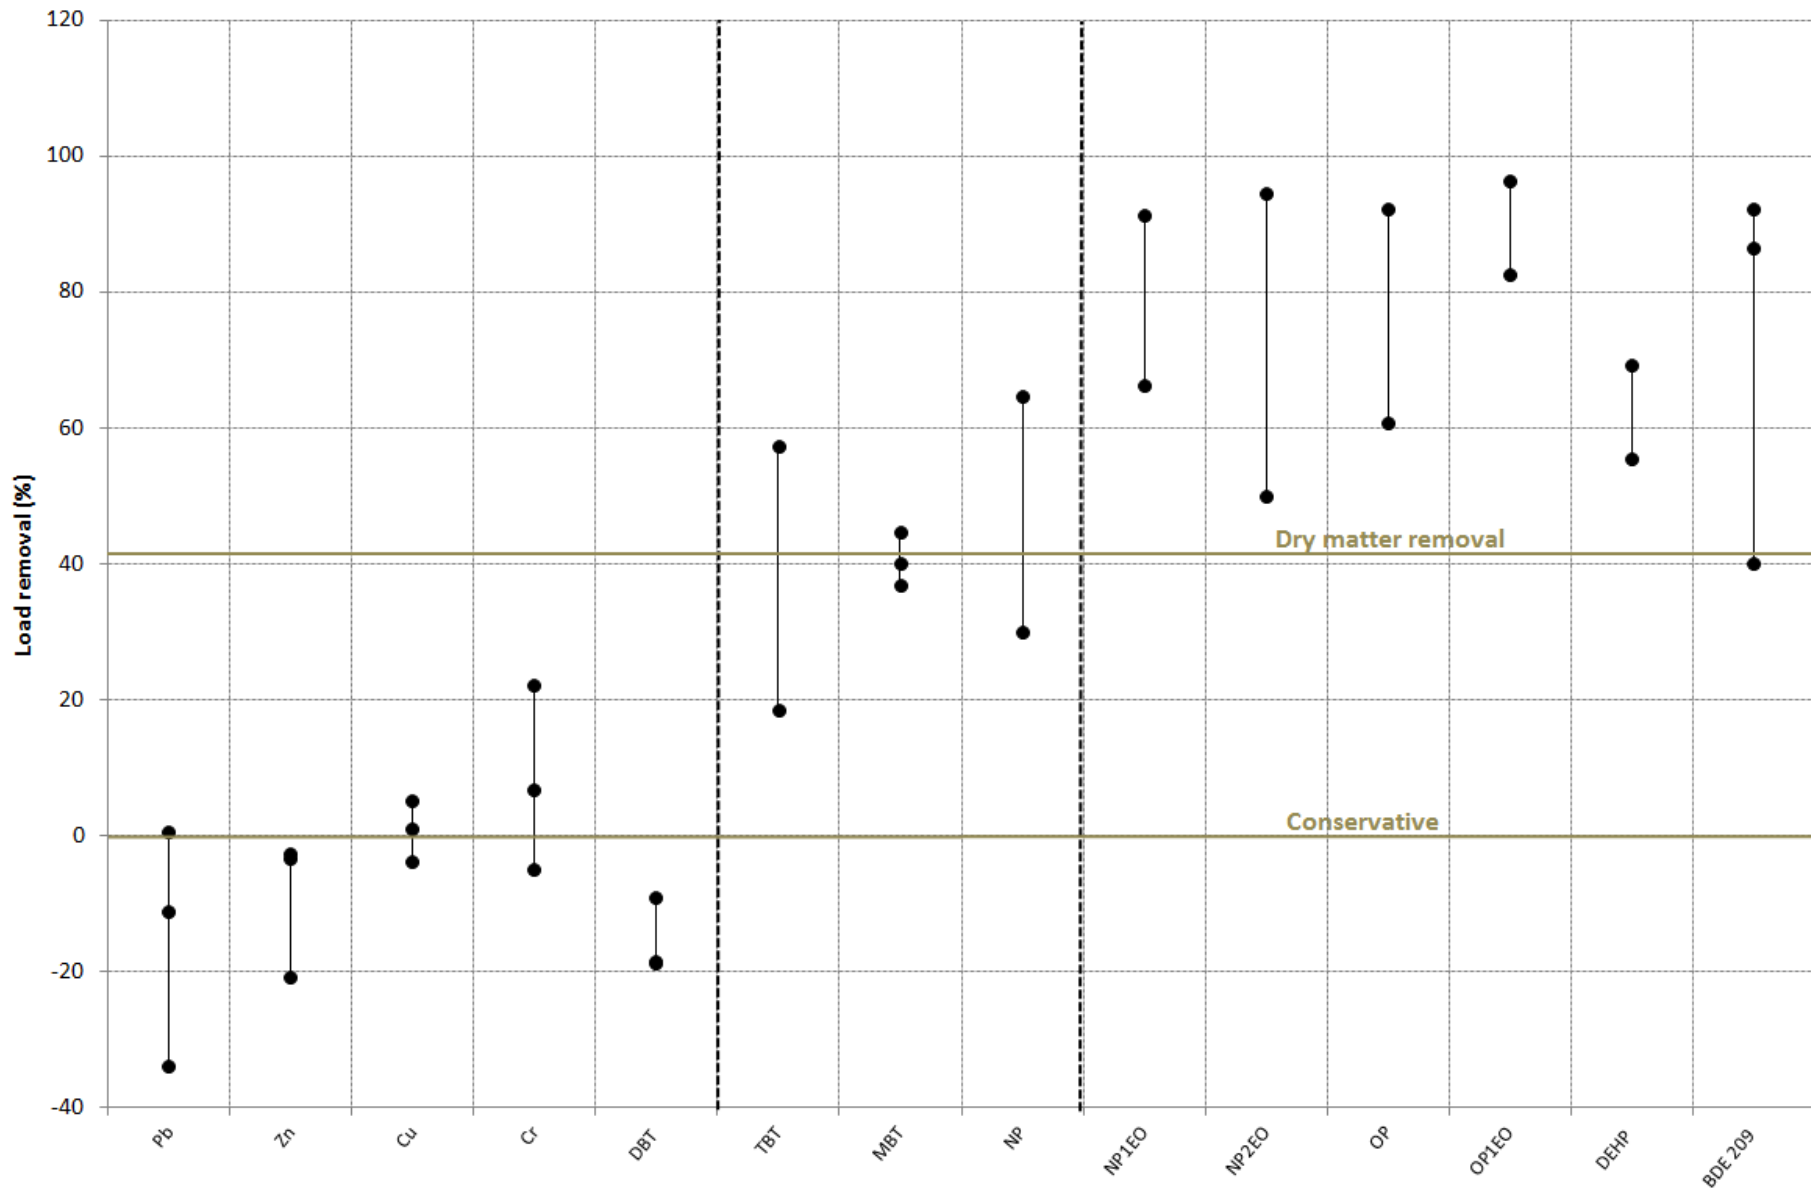


Figure 5 - Fate of micropollutants during mesophilic anaerobic digestion

1 As regards the three campaigns performed and similarly to dewatering processes, a higher
2 variability of removal is observed for organic pollutants (20-50%) than for metals like Pb or Cr
3 (max 30%), probably due to lower contents and a variability of degradation. However, three
4 different behaviors can be observed depending on the compound: i) conservation of load, ii)
5 removal in the same extent to dry matter removal and iii) removal higher than dry matter removal.
6 Conservative species are those which are not removed resulting in an increase of their contents
7 (mg/kg DM) in digested sludge, as matrix is partially removed (DM - 42%, Table 2). In contrary,
8 compounds with removal of load higher than dry matter have their content decreasing in sludge.
9 Finally, a load removal comparable to dry matter removal is linked with stability in sludge content.
10 Thus, even if every positive load removal corresponds to a real elimination of the compound, it
11 doesn't reflect automatically a decrease of content in sludge.

12
13 Loads of metals are conservative during digestion which is consistent as they are not biodegradable
14 and volatile. Thus, this confirms the validity of the data treatment strategy applied in this study.
15 This conservation results in an increase of metal contents in sludge within treatments. In the context
16 of land farming, limitation of emissions (contamination of water) seems to be the easiest strategy to
17 reduce metals contamination of sludge. As it was previously shown (Meybeck et al., 2007), this
18 strategy clearly leads to a decrease of contents in treated sludge.

19
20 Organotins are degraded similarly to dry matter except DBT which is not removed and even slightly
21 produced (-15%). This is confirmed by Figure 2 where it is clear that DBT content in digested
22 sludge is significantly higher than in other sludges. Biodegradation of TBT in DBT through
23 dealkylation mechanism has been observed at laboratory scale and in surface water and sediment
24 under both aerobic and anaerobic conditions (Craig, 2003; Maguire and Tkacz, 1985; Stasinakis et
25 al., 2005). This reaction in anaerobic digestion of sludge could counteract DBT biodegradation and

1 explain this result.

2

3 Alkylphenols are more removed than dry matter, except NP. Anaerobic biodegradation of
4 carboxylate and ethoxylate species to NP has been observed in the literature (Ejlertsson et al., 1998;
5 Lu et al., 2008) as well as NP biotransformation (Patureau et al., 2008; Salanitro and Diaz, 1995).
6 Thus, the lesser load removal observed for NP compared to other alkylphenols could actually
7 highlight that NP anaerobic biodegradation is slower than its formation from other alkylphenols
8 with longer chains, as proposed by (Chang et al., 2005; Stasinakis, 2012). However, biodegradation
9 kinetic measurements should be performed to validate this assumption. DEHP (50 - 70%) and BDE
10 209 (40 - 90%) are also removed in a higher proportion than matrix. For DEHP, such high removal
11 has already been observed at pilot scale by (Parker et al., 1994). Biodegradation of phthalate esters
12 such as DEHP has been reported under methanogenic conditions (El-Hadj et al., 2006; Gavala et al.,
13 2003; Marttinen et al., 2003) and results from hydrolysis of the two ester side chains to phthalic
14 acid and alkyl alcohols which can then be degraded to methane and carbon dioxide (Shelton et al.,
15 1984; Stasinakis, 2012). Concerning BDE 209, anaerobic debromination of this congener to less
16 brominated congeners could explain this removal as this mechanism has been highlighted by
17 several papers (Gerecke et al., 2005; He et al., 2006; Robrock et al., 2008).

18

19 Overall, alkylphenols, DEHP and BDE 209 are significantly removed (> 50%) while organotins and
20 NP are moderately removed (40%) and metals and DBT are not removed. These results show that
21 anaerobic digestion allows a significant removal of some micropollutants despite not being
22 designed for that.

23

24

25 **4. Conclusions**

26

27 This study has investigated the fate of a large panel of micropollutants (n=117) during sludge

1 treatment and the quality of treated sludges obtained. While some data are available for anaerobic
2 digestion, centrifugation and thermal drying are still not documented. In addition, the content of a
3 lot of micropollutants in French and Parisian sludges in particular is not well documented.

4

5 Overall, treated sludges have a similar micropollutant pattern despite different treatments. Some
6 compounds are always detected (metals, organotins, alkylphenols, DEHP) while others are never
7 detected (pesticides, BBPs and VOCs). Contents found in the different sludges are rather similar
8 and in accordance with previous works. In treated sludges, micropollutant contents are always in
9 compliance with regulations except two sludge cake samples for which Cd exceeds the threshold
10 value. Historical evolution of micropollutants in sludge cake allows showing that contamination is
11 directly linked to compounds uses and establishment of regulations on uses seems to be an efficient
12 strategy to decrease the sludge content of micropollutants, as it is the case for metals.

13

14 Regarding dewatering processes, centrifugation and thermal drying seem to have no significant
15 impact on micropollutant content of sludge overall. A slight removal of alkylphenols, MBT and
16 PAHs by abiotic transfers (volatilization, hydrolysis) seems however to be possible by thermal
17 drying thanks to the high temperature inside the reactor. In contrary, digestion enables the removal
18 of a lot of organics. DEHP, BDE 209, organotins and alkylphenols are similarly or better removed
19 than dry matter which is the designing parameter of the process, while metals are persistent. This
20 result confirms that among the existing and largely used sludge treatments, digestion is the only one
21 with composting to really allow a reduction of the biodegradable micropollutants load.

22

23 Specific studies on mechanisms involved in thermal drying and on the fate of micropollutants
24 during composting should be held to complete this work. In addition, a similar work will be soon
25 performed on pharmaceuticals, to enrich the data base obtained and improve the understanding of

1 the micropollutant fate during sludge treatments. An optimization of digestion operational
2 parameters (temperature, hydraulic retention time, pre-treatment) in order to improve matrix
3 elimination could lead to a significant improvement of treated sludge quality in terms of organic
4 micropollutants, as they influence the biodegradation of a lot of compounds such as DEHP or
5 alkylphenols (El-Hadj et al., 2007; Stasinakis, 2012). However, some specific processes such as
6 bioleaching treatments (Pathak et al., 2009) could be implemented in parallel of regulations
7 reinforcement to decrease the metal contents of sewage sludge, as they are currently persistent in
8 almost all the treatments including digestion.

9 10 ACKNOWLEDGEMENT

11
12 This study was carried out within the framework of OPUR (Observatory of Urban Pollutants)
13 research program. The authors would like to thank SIAAP teams for their technical support and
14 their active participation in sampling campaigns and data analysis.

15 16 LIST OF REFERENCES

- 17
18 Abad, E., Martínez, K., Planas, C., Palacios, O., Caixach, J., Rivera, J., 2005.
19 Priority organic pollutant assessment of sludges for agricultural purposes.
20 *Chemosphere* 61, 1358-1369.
21 Aparicio, I., Santos, J.L., Alonso, E., 2009. Limitation of the concentration of
22 organic pollutants in sewage sludge for agricultural purposes: A case study in
23 South Spain. *Waste Management* 29, 1747-1753.
24 Bergé, A., Cladière, M., Gasperi, J., Coursimault, A., Tassin, B., Moilleron,
25 R., 2012a. Meta-analysis of environmental contamination by alkylphenols. *Env Sci*
26 *Poll Res Int* 19, 3798-3819.
27 Bergé, A., Gasperi, J., Rocher, V., 2012b. Phthalate and alkylphenol removal
28 within wastewater treatment plants using physicochemical lamellar clarification
29 and biofiltration, 11th International Conference on Water Pollution: Modelling,
30 Monitoring and Management. *Water Pollution XI*, UK.
31 Blanchard, M., Alliot, F., Bourges, C., Dargnat, C., Desportes, A., Dinh, T.,
32 Eurin, J., Labadie, P., LeBot, B., Mompelat, S., Moreau-Guigon, E., Tamtam, F.,
33 Teil, M.-J., Chevreuril, M., 2012. Contamination of urban sludge from different
34 treatment processes. Example of phthalates, PBDE, PAH and antibiotics., *Piren-*
35 *Seine 2012*, Paris (in French).
36 Blanchard, M., Teil, M.J., Ollivon, D., Legenti, L., Chevreuril, M., 2004.
37 Polycyclic aromatic hydrocarbons and polychlorobiphenyls in wastewaters and
38 sewage sludges from the Paris area (France). *Environmental Research* 95, 184-197.
39 Byrns, G., 2001. The fate of xenobiotic organic compounds in wastewater
40 treatment plants. *Water Research* 35, 2523-2533.
41 Chang, B.V., Chiang, F., Yuan, S.Y., 2005. Anaerobic degradation of nonylphenol
42 in sludge. *Chemosphere* 59, 1415-1420.
43 Chen, M., Li, X.-m., Yang, Q., Zeng, G.-m., Zhang, Y., Liao, D.-x., Liu, J.-j.,
44 Hu, J.-m., Guo, L., 2008. Total concentrations and speciation of heavy metals in
45 municipal sludge from Changsha, Zhuzhou and Xiangtan in middle-south region of
46 China. *Journal of Hazardous Materials* 160, 324-329.
47 Chipasa, K.B., 2003. Accumulation and fate of selected heavy metals in a
48 biological wastewater treatment system. *Waste Management* 23, 135-143.

1 Clarke, B.O., Smith, S.R., 2011. Review of 'emerging' organic contaminants in
2 biosolids and assessment of international research priorities for the
3 agricultural use of biosolids. *Environment International* 37, 226-247.
4 Craig, P.J., 2003. *Organometallic compounds in the environment*. John Wiley &
5 Sons.
6 Dong, B., Liu, X., Dai, L., Dai, X., 2013. Changes of heavy metal speciation
7 during high-solid anaerobic digestion of sewage sludge. *Bioresource Technology*
8 131, 152-158.
9 EC, 1986. Directive of the European Parliament and of the Council n°86/278/EEC
10 establishing a framework for the community action in the field of sewage sludge
11 policy. JO-EU L 181.
12 EC, 1991. Directive of the European Parliament and of the Council n°91/271/EC
13 establishing a framework for the community action in the field of sewage sludge
14 policy. JO-EU L 135/40.
15 EC, 2001. Disposal and recycling routes for sewage sludge. DG Environment B/2.
16 Ejlertsson, J., Nilsson, M.-L., Kylin, H., Bergman, Å., Karlson, L., Öquist, M.,
17 Svensson, B.H., 1998. Anaerobic Degradation of Nonylphenol Mono- and
18 Diethoxylates in Digester Sludge, Landfilled Municipal Solid Waste, and
19 Landfilled Sludge. *Environmental Science & Technology* 33, 301-306.
20 El-Hadj, B., Dosta, T., Mata-Alvarez, J., 2006. Biodegradation of PAH and DEHP
21 micro-pollutants in mesophilic and thermophilic anaerobic sewage sludge
22 digestion. *International Water Association*, London, ROYAUME-UNI.
23 El-Hadj, T.B., Dosta, J., Márquez-Serrano, R., Mata-Álvarez, J., 2007. Effect of
24 ultrasound pretreatment in mesophilic and thermophilic anaerobic digestion with
25 emphasis on naphthalene and pyrene removal. *Water Research* 41, 87-94.
26 Eljarrat, E., Marsh, G., Labandeira, A., Barceló, D., 2008. Effect of sewage
27 sludges contaminated with polybrominated diphenylethers on agricultural soils.
28 *Chemosphere* 71, 1079-1086.
29 Fent, K., 1996. Organotin compounds in municipal wastewater and sewage sludge:
30 contamination, fate in treatment process and ecotoxicological consequences.
31 *Science of the Total Environment* 185, 151-159.
32 Fytili, D., Zabaniotou, A., 2008. Utilization of sewage sludge in EU application
33 of old and new methods—A review. *Renewable and Sustainable Energy Reviews* 12,
34 116-140.
35 Gasperi, J., Rocher, V., Gilbert, S., Azimi, S., Chebbo, G., 2010. Occurrence
36 and removal of priority pollutants by lamella clarification and biofiltration.
37 *Water Research* 44, 3065-3076.
38 Gavala, H.N., Alatrieste-Mondragon, F., Iranpour, R., Ahring, B.K., 2003.
39 Biodegradation of phthalate esters during the mesophilic anaerobic digestion of
40 sludge. *Chemosphere* 52, 673-682.
41 Gerecke, A.C., Hartmann, P.C., Heeb, N.V., Kohler, H.-P.E., Giger, W., Schmid,
42 P., Zennegg, M., Kohler, M., 2005. Anaerobic Degradation of Decabromodiphenyl
43 Ether. *Environmental Science & Technology* 39, 1078-1083.
44 Ghanem, A., Bados, P., Estaun, A.R., de Alencastro, L.F., Taibi, S., Einhorn,
45 J., Mougín, C., 2007. Concentrations and specific loads of glyphosate, diuron,
46 atrazine, nonylphenol and metabolites thereof in French urban sewage sludge.
47 *Chemosphere* 69, 1368-1373.
48 González, M.M., Martín, J., Santos, J.L., Aparicio, I., Alonso, E., 2010.
49 Occurrence and risk assessment of nonylphenol and nonylphenol ethoxylates in
50 sewage sludge from different conventional treatment processes. *Science of the*
51 *Total Environment* 408, 563-570.
52 Harrison, E.Z., Oakes, S.R., Hysell, M., Hay, A., 2006. Organic chemicals in
53 sewage sludges. *Science of the Total Environment* 367, 481-497.
54 He, J., Robrock, K.R., Alvarez-Cohen, L., 2006. Microbial Reductive
55 Debromination of Polybrominated Diphenyl Ethers (PBDEs). *Environmental Science &*
56 *Technology* 40, 4429-4434.
57 Joss, A., Siegrist, H., Ternes, T.A., 2008. Are we about to upgrade wastewater
58 treatment for removing organic micropollutants ? *Water Science and Technology*
59 57.
60 Karvelas, M., Katsoyiannis, A., Samara, C., 2003. Occurrence and fate of heavy
61 metals in the wastewater treatment process. *Chemosphere* 53, 1201-1210.
62 Kelessidis, A., Stasinakis, A.S., 2012. Comparative study of the methods used
63 for treatment and final disposal of sewage sludge in European countries. *Waste*
64 *Management* 32, 1186-1195.
65 Kepp, U., Machenbach, I., Weisz, N., Solheim, O.E., 2000. Enhanced stabilisation
66 of sewage sludge through thermal hydrolysis: three years of experience with full
67 scale plant. *International Water Association*, London, ROYAUME-UNI.
68 Knoth, W., Mann, W., Meyer, R., Nebhuth, J., 2007. Polybrominated diphenyl ether
69 in sewage sludge in Germany. *Chemosphere* 67, 1831-1837.

1 Langford, K.H., Scrimshaw, M.D., Birkett, J.W., Lester, J.N., 2005. The
2 partitioning of alkylphenolic surfactants and polybrominated diphenyl ether
3 flame retardants in activated sludge batch tests. *Chemosphere* 61, 1221-1230.
4 Law, R.J., Allchin, C.R., de Boer, J., Covaci, A., Herzke, D., Lepom, P.,
5 Morris, S., Tronczynski, J., de Wit, C.A., 2006. Levels and trends of brominated
6 flame retardants in the European environment. *Chemosphere* 64, 187-208.
7 Lu, J., Jin, Q., He, Y., Wu, J., Zhang, W., Zhao, J., 2008. Anaerobic
8 degradation behavior of nonylphenol polyethoxylates in sludge. *Chemosphere* 71,
9 345-351.
10 Maguire, R.J., Tkacz, R.J., 1985. Degradation of the tri-n-butyltin species in
11 water and sediment from Toronto Harbor. *Journal of Agricultural and Food*
12 *Chemistry* 33, 947-953.
13 Martin, S., Choubert, J.M., Ginestet, P., Coquery, M., 2008. Semi-quantitative
14 analysis of a specific database on priority and emerging substances in
15 wastewater and sludge. *Water Science and Technology* 57, 10.
16 Marttinen, S.K., Kettunen, R.H., Rintala, J.A., 2003. Occurrence and removal of
17 organic pollutants in sewages and landfill leachates. *Science of The Total*
18 *Environment* 301, 1-12.
19 Meybeck, M., Lestel, L., Bonte, P., Moilleron, R., Colin, J.L., Rousselot, O.,
20 Herve, D., de Ponteves, C., Grosbois, C., Thevenot, D.R., 2007. Historical
21 perspective of heavy metals contamination (Cd, Cr, Cu, Hg, Pb, Zn) in the Seine
22 River basin (France) following a DPSIR approach (1950-2005). *Science of the*
23 *Total Environment* 375, 204-231.
24 Moletta, R., 2008. Méthanisation de la biomasse (Biomass methanisation).
25 *Techniques de l'ingénieur* (in French).
26 Neyens, E., Baeyens, J., 2003. A review of thermal sludge pre-treatment
27 processes to improve dewaterability. *Journal of Hazardous Materials* 98, 51-67.
28 Olofsson, U., Bignert, A., Haglund, P., 2012. Time-trends of metals and organic
29 contaminants in sewage sludge. *Water Research* 46, 4841-4851.
30 Parker, W.J., Monteith, H.D., Melcer, H., 1994. Estimation of anaerobic
31 biodegradation rates for toxic organic compounds in municipal sludge digestion.
32 *Water Research* 28, 1779-1789.
33 Pathak, A., Dastidar, M.G., Sreekrishnan, T.R., 2009. Bioleaching of heavy
34 metals from sewage sludge: A review. *Journal of Environmental Management* 90,
35 2343-2353.
36 Patureau, D., Delgenes, N., Delgenes, J.-P., 2008. Impact of sewage sludge
37 treatment processes on the removal of the endocrine disrupters nonylphenol
38 ethoxylates. *Chemosphere* 72, 586-591.
39 Ricklund, N., Kierkegaard, A., McLachlan, M.S., Wahlberg, C., 2009. Mass balance
40 of decabromodiphenyl ethane and decabromodiphenyl ether in a WWTP. *Chemosphere*
41 74, 389-394.
42 Robrock, K.R., Korytár, P., Alvarez-Cohen, L., 2008. Pathways for the Anaerobic
43 Microbial Debromination of Polybrominated Diphenyl Ethers. *Environmental Science*
44 *& Technology* 42, 2845-2852.
45 Salanitro, J.P., Diaz, L.A., 1995. Anaerobic biodegradability testing of
46 surfactants. *Chemosphere* 30, 813-830.
47 Scancar, J., Milacic, R., Strazar, M., Burica, O., 2000. Total metal
48 concentrations and partitioning of Cd, Cr, Cu, Fe, Ni and Zn in sewage sludge.
49 *The Science of the Total Environment* 250, 9-19.
50 Shelton, D.R., Boyd, S.A., Tiedje, J.M., 1984. Anaerobic biodegradation of
51 phthalic acid esters in sludge. *Environmental Science & Technology* 18, 93-97.
52 Sprynskyy, M., Kosobucki, P., Kowalkowski, T., Buszewski, B., 2007. Influence of
53 clinoptilolite rock on chemical speciation of selected heavy metals in sewage
54 sludge. *Journal of Hazardous Materials* 149, 310-316.
55 Stasinakis, A.S., 2012. Review on the fate of emerging contaminants during
56 sludge anaerobic digestion. *Bioresource Technology* 121, 432-440.
57 Stasinakis, A.S., Gatidou, G., Mamais, D., Thomaidis, N.S., Lekkas, T.D., 2008.
58 Occurrence and fate of endocrine disrupters in Greek sewage treatment plants.
59 *Water Research* 42, 1796-1804.
60 Stasinakis, A.S., Thomaidis, N.S., Nikolaou, A., Kantifes, A., 2005. Aerobic
61 biodegradation of organotin compounds in activated sludge batch reactors.
62 *Environmental Pollution* 134, 431-438.
63 Stevens, J.L., Northcott, G.L., Stern, G.A., Tomy, G.T., Jones, K.C., 2002.
64 PAHs, PCBs, PCNs, Organochlorine Pesticides, Synthetic Musks, and
65 Polychlorinated n-Alkanes in U.K. Sewage Sludge: Survey Results and
66 Implications. *Environmental Science & Technology* 37, 462-467.
67 Thevenot, D.R., Moilleron, R., Lestel, L., Gromaire, M.-C., Rocher, V., Cambier,
68 P., Bonte, P., Colin, J.-L., de Ponteves, C., Meybeck, M., 2007. Critical budget
69 of metal sources and pathways in the Seine River basin (1994-2003) for Cd, Cr,

1 Cu, Hg, Ni, Pb and Zn. *Science of The Total Environment*, Human activity and
2 material fluxes in a regional river basin: the Seine River watershed - Seine
3 Special Issue 375, 180-203.

4 Tørsløv, J., Miljøstyrelsen, Environment, V.I.f.t.W., 1997. Use of Waste
5 Products in Agriculture: Contamination Level, Environmental Risk Assessment and
6 Recommendations for Quality Criteria.

7 Tuncal, T., Jangam, S.V., Gunes, E., 2011. Abatement of Organic Pollutant
8 Concentrations in Residual Treatment Sludges: A Review of Selected Treatment
9 Technologies Including Drying. *Drying Technology* 29, 1601-1610.

10 Valo, A., Carrère, H., Delgenès, J.P., 2004. Thermal, chemical and thermo-
11 chemical pre-treatment of waste activated sludge for anaerobic digestion.
12 *Journal of Chemical Technology & Biotechnology* 79, 1197-1203.

13 Veeken, A., Hamelers, B., 1999. Effect of temperature on hydrolysis rates of
14 selected biowaste components. *Bioresource Technology* 69, 249-254.

15 Voulvoulis, N., Lester, J.N., 2006. Fate of organotins in sewage sludge during
16 anaerobic digestion. *Science of the Total Environment* 371, 373-382.

17
18